

Caution

- The following repair services shall be provided for a fee.
- Defect caused by careless use
 - Defect caused by repair performed at places other than the authorized service centers
 - Defect caused by the disassembly of the device by the user
 - Defect caused by natural disasters such as flood, fire, and earthquake

**We are not responsible for your lost data.
If warranty label is detached from iodd,
it can not be covered by warranty.**



CNS Co., Ltd. Rm 702, Hyundai F&G B/D. 853-1,
Dongchun-Dong, Suji-Gu, Yongin-City, Gyeonggi-Do,
448-120 Korea
www.i-odd.com

QUICK GUIDE




iodd
PORTABLE VIRTUAL ROM

Package Contents



Name of Parts

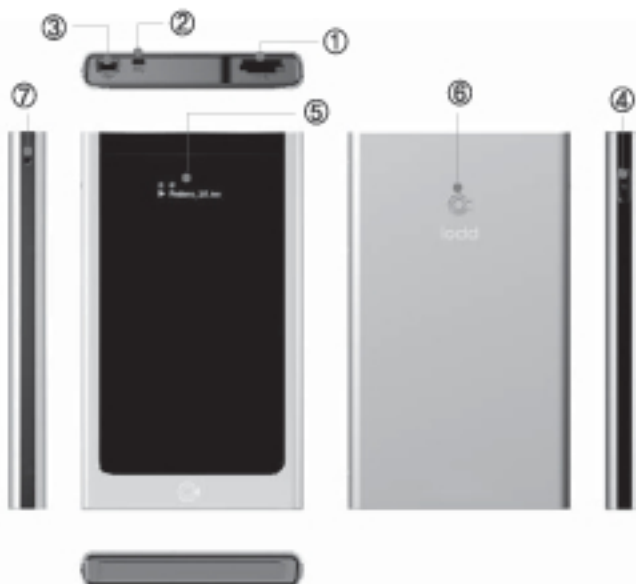

- ① eSATA port : Connect PC with eSATA cable
- ② Write Protect Switch : Data Lock
- ③ USB port : Connect PC with USB cable
- ④ File Select Key : File Select function
- ⑤ OLED Display : File List search and status check
- ⑥ iodd LED logo : While data read/write,
dual LED twinkle
- ⑦ Easy Open Button

Warranty

1. This product has passed through strict quality control and testing process.
2. Any defect found after normal use and during the warranty period shall be repaired as free of charge.
3. When request repair, please register after consulted through phone or e-mail.
4. Do not lose this Warranty (Not reissued).
5. Exchange and refund are limited to a person who buy.

Serial Number	
Warranty Period	1 Year
Seller	
Date of Purchase	
Customer	Name
	Address
	Phone
	E-Mail

Product Specification

■ Specification

- Interface
USB 2.0/1.1, eSATA
- Maximum Data Transfer Rate
480Mbps(USB2.0), 3Gbps(eSATA)
- DC5V(USB power), 2.5"HDD

■ Support OS

- Windows 2000/XP/Vista, WinCE
- MAC OS, Linux, Embedded OS

■ Product Dimension

130x76x12.6 (LxWxH / mm)

■ PC Requirements

- Intel Pentium / 350Mhz over or compatible
- Memory 60MB over

■ Special Feature


- Portable Disc Image File Player
- Loading CD/DVD Image file (ISO) in HDD and transfer to Host Device
- CD/DVD Emulation function
- With Display panel, Select ISO file and check status

■ Case Mateial : Aluminium Alloy, Acryl, PC (Poly Carbonate)

Connect to PC (USB port)

■ WINDOWS XP/2000/VISTA User

- Like below picture, when device is connected to PC with USB cable, then recognized and can be used immediately

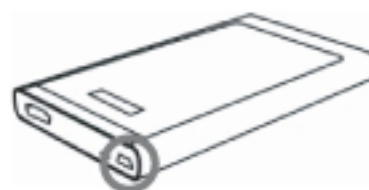

* Windows98 user needs to install Windows 98 driver

* It can be recognized as removable disc or Local disc according to PC spec

Safety Removal

- * Double-click the Safety Remove Hardware Icon in the Tray
- * Click the Stop button followed by OK

Connect to PC (eSATA)

■ IODD external HDD support Hot Swap when eSATA connection

(Please check in advance that PC main board or controller supports Hot Swap because not all main board or controller supports Hot Swap)



① Connect eSATA cable to IODD

eSATA cable doesn't support power, so enclosed USB cable should be connected together

② Start → Control Panel → System → Hardware → Device Manager → Disk Drive (Click Mouse Right Button)

→ Search Hardware Change List

Check if it's recognized in Device Manager

(If not recognized, please check cable connection to IODD)

③ When Remove, Click Right button on

"My Computer" → "Manage" → Select "Device → Manager"

→ Select "Disk Drive", then remove with mouse right button.

After remove USB cable, then remove eSATA cable.


* After connect eSATA cable, connect USB cable. (When removal, reverse order)

* If cable is unplugged with force while operating, it may make fatal error to system and IODD.

CD image

■ IODD external HDD is recognize virtual CD-ROM and mass storage at the same time.

CD image file selected with select key in Root folder is emulated as virtual CD-ROM.

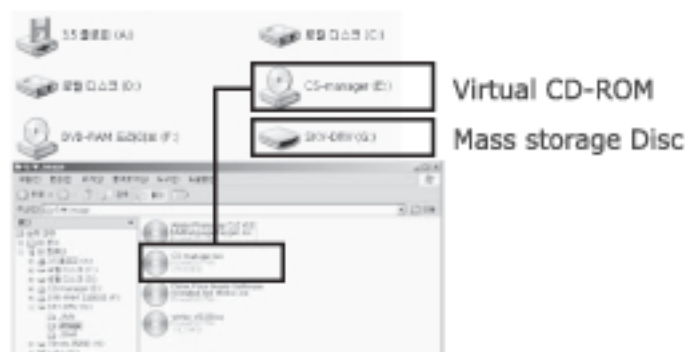

■ OLED Display Panel Icon

- 🔒 Display when Lock is set
- 🔄 File Loading: Icon Twinkling
- 🔦 File Running: Icon Light up

